


KSE 075; KSE 120; KSE 240

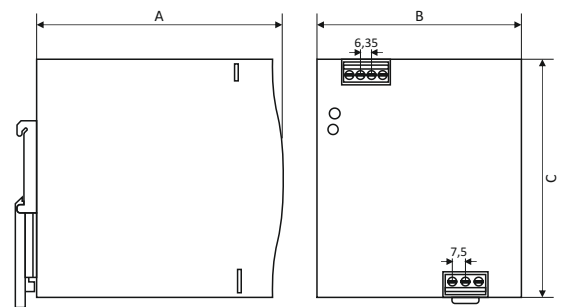

KSE 480

Power: **75; 120; 240; 480W**  
 Input voltage: **85 - 264V AC 47/63Hz; 140 - 340V DC**  
 Output voltage: **12; 24; 48V**  
 Efficiency: **80 - 94% (typical)**

Stabilized, direct current output power supplies designed for assembly in general electric installations on T-35 bus. Equipped with LED diode signaling activation and overload, cooled by natural air flow. The 240W and 480W power supplies are additionally equipped with the PFC power factor improvement system. Overcurrent, short circuit and thermal protection. Manufactured with IP20 protection grade.

Manufactured in compliance with EN55032, EN61000-3-2, EN61000-3-3, EN55035, EN60950-1.

Type	Power	Output voltage	Current	Dimensions [mm]			Weight [kg]
	[W]	[V]	[A]	A	B	C	
<b>KSE 07512M</b>	75,6	12	6,3	102	32	125,2	0,55
<b>KSE 12012M</b>	120	12	10	113,5	40	125,2	0,65
<b>KSE 24012M</b>	168	12	14	113,5	63	125,5	1,08
<b>KSE 07524M</b>	76,8	24	3,2	102	32	125,2	0,55
<b>KSE 12024M</b>	120	24	5	113,5	40	125,2	0,65
<b>KSE 24024M</b>	240	24	10	113,5	63	125,5	1,08
<b>KSE 48024M</b>	480	24	20	128	85,5	125,2	1,90
<b>KSE 12048M</b>	120	48	2,5	113,5	40	125,2	0,65
<b>KSE 24048M</b>	240	48	5	113,5	63	125,5	1,08
<b>KSE 48048M</b>	480	48	10	128	85,5	125,2	1,90