


KSE 010; KSE 020

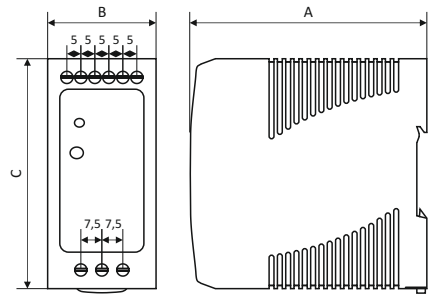

KSE 040; KSE 060; KSE 100

Power: **10; 20; 40; 60; 100W**
 Input voltage: **85 - 264V AC 47/63Hz; 140 - 340V DC**
 Output voltage: **12; 24; 48V**
 Efficiency: **80 - 94% (typical)**

Stabilized, direct current output power supplies designed for assembly in general electric installations on T-35 bus. Equipped with LED diode signaling activation and overload, cooled by natural air flow. The 100W power supplies are additionally equipped with the PFC power factor improvement system. Overcurrent, short circuit and thermal protection. Manufactured with IP20 protection grade.

Manufactured in compliance with EN55032, EN61000-3-2, EN61000-3-3, EN55035, EN60950-1.

Type	Power	Output voltage	Current	Dimensions [mm]			Weight [kg]
	[W]	[V]	[A]	A	B	C	
KSE 01012P	10	12	0,84	100	22,5	90	0,18
KSE 02012P	20	12	1,67	100	22,5	90	0,20
KSE 04012P	39,9	12	3,33	100	40	90	0,32
KSE 06012P	60	12	5	100	40	90	0,35
KSE 10012P	90	12	7,5	100	55	90	0,45
KSE 01024P	10	24	0,42	100	22,5	90	0,18
KSE 02024P	24	24	1	100	22,5	90	0,20
KSE 04024P	40,8	24	1,7	100	40	90	0,32
KSE 06024P	60	24	2,5	100	40	90	0,35
KSE 10024P	96	24	4	100	55	90	0,45